

Instruction / Installation Sheet

30" Extended Plastic Hinge Cover

Part # 80-1530-HEXT-5

DATA COMM™
ELECTRONICS

Parts Needed

- 30" Extended Plastic Hinge Cover
- Eight (8) Metal Wood Screws
- 30" Plastic Enclosure Box p/n 80-1530 (sold separately)

Tools Needed:

- Flat Blade and Phillips Head Screwdriver
- Drill is optional
- Utility Knife

DataComm Electronics, Inc.
6349 Peachtree Street
Norcross, GA 30071-1725
888.223.7977
770.662.8205

www.DataCommElectronics.com

Installation Instructions:

1. Align Cover

After the 80-1530 has been installed in the wall and the drywall is up, Align the 30" Extended Plastic Hinge Cover extrusions with the back box slots.


2. Screw on Cover

Use the (8) Included wood screws to attach the 30" Extended Plastic Hinge Cover to the studs.

CAUTION:

- Never install low voltage wiring during lightning storms.
- Never install low voltage wiring in wet locations unless the wire is specifically designed for wet locations.
- Never touch un-insulated low voltage wires or terminals unless the wire has been disconnected at its source.
- Do not use this product near water. For example: near a bath tub, wash bowl, kitchen sink, laundry tub, in a wet basement or near a swimming pool.
- Consult and comply with local building and electrical codes, before and during installation of any equipment.
- Never push objects of any kind into this product through cabinet slots as they may touch dangerous voltages.
- Use caution when installing low voltage cables.
- Read and understand all instructions.
- Save these Instructions.

NOTE: The 30" Plastic Enclosure with Extended Hinge Cover is a distribution panel for low voltage wiring systems. It is not designed to be used as an AC power distribution panel. Use only Class 2 powered or passive devices.

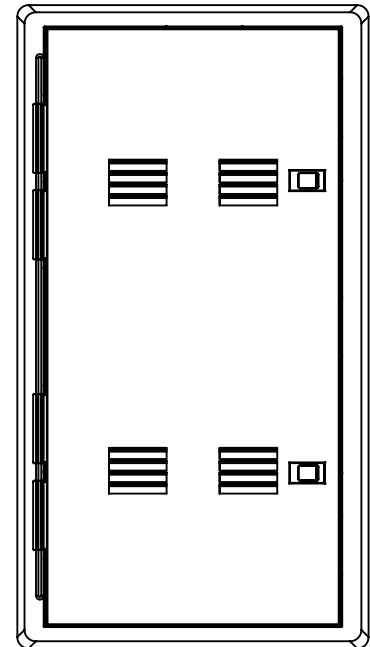

ETL LISTED. CONFORMS TO UL STD 2416 ANSI/UL STD 60950-1 CERTIFIED TO CAN/CSA STD C22.2 NO 60950-1